



Project _____

Item # _____

Quantity _____

Glo-Ray 2-Go™ Heated Shelves

Models: GRS2GC-3920-2, -4

The Hatco Glo-Ray 2-Go™ Heated Shelves are designed specifically for your delivery and carry-out needs in mind. Capable of holding a great quantity of packed hot food items at optimum serving temperatures, the GRS2GC models hold bags and boxes up to 30 minutes with a high temperature range of up to 93° .



GRS2GC-3920-2



GRS2GC-3920-4

Standard Features:

- Shelves are 507 mm deep and 986 mm wide, with a 289 mm clearance between shelves that is large enough to fit a variety of carry out/delivery bags and boxes.
- Each shelf features a digital temperature control, a power On/Off switch, and jumper power cords.
- Units feature stainless steel shelves with heated bases that are thermostatically-controlled.



Digital temperature control for each shelf



Power On/Off switch, and jumper power cords for each shelf

For operation, location and safety information, please refer to the Installation & Operating Manual.




HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com



Glo-Ray 2-Go™ Heated Shelves

Models: GRS2GC-3920-2, -4

Models: GRS2GC-3920-2,-4

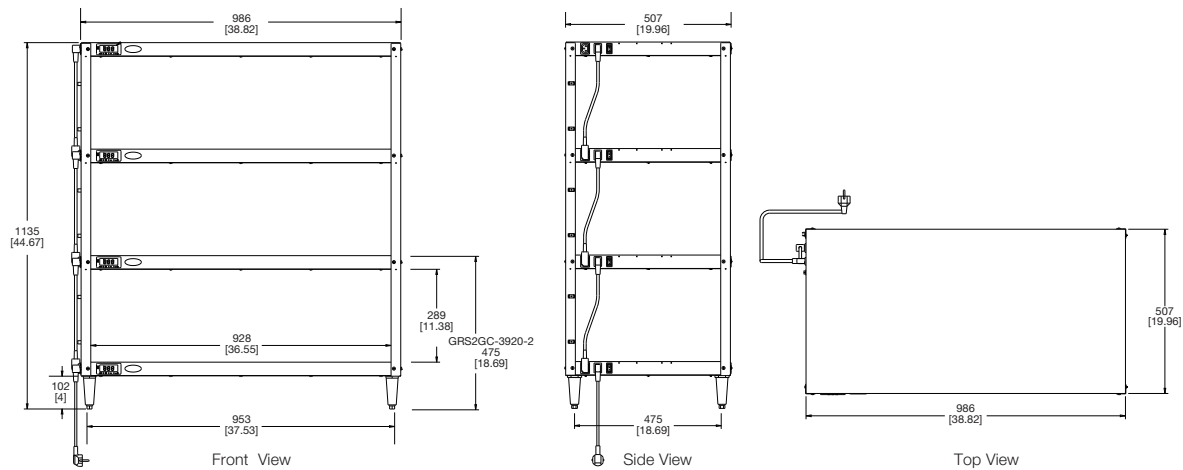

SPECIFICATIONS

Glo-Ray 2-Go™ Heated Shelves

Model	Description	Dimensions (W x D x H)	Volts	Watts	Amps	Ship Weight
GRS2GC-3920-2	2 shelves	986 x 507 x 475 mm	220-240	694-824	3.2-3.4	21kg
GRS2GC-3920-4	4 shelves	986 x 507 x 1135 mm	220-240	1393-1648	6.3-6.9	40kg

* Ship weight includes packaging.

All Heated Shelf Models Feature:


Models shipped with: 102 mm adjustable plastic feet, a 1829 mm power cord with plug and jumper cords.

Cord Location: Server side, bottom right corner.

CORD LOCATION

Server side, bottom corner.

PLUG CONFIGURATIONS

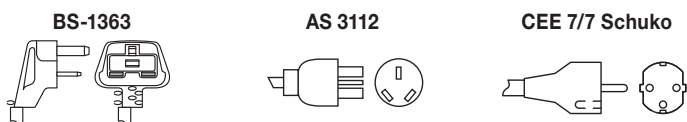

PRODUCT SPECS

Glo-Ray 2-Go™ Heated Shelves

The Heated Shelves shall be a Glo-Ray 2-Go™ Model ... , rated at ... volts, and ... watts, by the Hatco Corporation.

The shelves shall consist of thermostatically-controlled heated base, electronic controls with separate heat for each shelf and a 6' (1829 mm) cord with plug and jumper cords.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com