



Project:

Item Number:

Quantity:

INTERNATIONAL CONVEYOR TOASTERS - 550-800 SLICES PER HOUR* (JT2, JT2H)



JT2



JT2H

DESCRIPTION

Vollrath's 550-800 slices per hour conveyor toasters feature easy-to-use conveyor control and variable top and bottom heat control to perfectly toast and warm a variety of bread products – bread, buns, rolls, bagels, waffles, pita bread, Texas toast and English muffins. These toasters provide mid-size restaurants with the flexibility to a variety of bread products for breakfast and lunch menu items.

WARRANTY

- Warrantied parts: The warranty period is 2 year parts, 1 year labor.
- Heater tubes: The warranty period is 1 year parts and labor. Heater tube glass damage is not covered by this warranty.
- For full warranty details, please refer to www.Vollrath.com.

AGENCY LISTINGS



** Slices per hour is based on maximum conveyor speed. Conveyor speed determines toasting time and affects color and texture of the toast. Results may vary based upon type of bread, color and texture preference.*

Due to continued product improvement, please consult www.vollrath.com for current product specifications.

ITEMS

| Item No. | Model | Description |
|---------------|-------|--|
| CT4-23080003 | JT2 | 800 Slices Per Hour*, UK |
| CT4-23080002 | | 800 Slices Per Hour*, Schuko |
| CT4H-23055003 | JT2H | 550 Slices Per Hour*, UK, High Clearance |
| CT4H-23055002 | | 550 Slices Per Hour*, Schuko, High Clearance |

FEATURES

- Stainless steel and aluminized steel construction.
- Variable speed control allows for real-time adjustments.
- Variable top and bottom heat control.
- 10½" (26.7 cm) 2-slice wide conveyor is larger than industry standard for better toasting results.
- Product entry opening on high clearance toasters can be adjusted from 1½" (3.8 cm) to 3" (7.6).
- Forced convection toasting promotes uniform results and energy efficiency.
- Energy efficient, fast reacting, quartz heaters.
- High-temperature bearings ensure smooth operation and do not require lubrication.
- High-quality, insulated wires help prevent against dry rotting and cracking.
- High-temperature thermoplastic terminal blocks with stainless steel clamping provides superior connections; designed for ease of serviceability.
- Maintenance-free drive system; stainless steel drive chain does not require lubrication.
- Fan control switch senses temperature of unit and keeps fan running until unit is completely cool.
- Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows machine to quickly return to full power.
- Adjustable legs.
- 4½ ft. (1.4 m) cord with plug.
- Made in the USA.

CLEARANCE AND ENVIRONMENT REQUIREMENTS

- Do not place on surfaces or near walls, partitions or kitchen furniture unless they are made of non-combustible material or clad with non-combustible heat-insulating material. Toasters must not be used near or below curtains and other combustible materials.
- Maximum ambient temperature: 104° F (40 ° C).

| Approvals | Date |
|-----------|------|
| | |

The Vollrath Company, L.L.C. Headquarters
1236 North 18th Street
Sheboygan, Wisconsin
53081-3201 USA
Main Tel: 800-624-2051 or 920-457-4851
Main Fax: 800-752-5620 or 920-459-6573
Canada Customer Service: 800-695-8560
Tech Services: techservices@vollrathco.com
www.vollrath.com


Pujadas
Ctra. de Castanyet,
132 P.O. Box 121
17430 Santa Coloma de Farners
(Girona) – Spain
Tel. +34-972-84-32-01
info@pujadas.es

Vollrath of China
Vollrath Shanghai Trading Limited
Room 201, Building A
Xin Yi Plaza
1618 Yi Shan Road
Shanghai, 201103
China, P.R.C.
Tel: +86-21-5058-9580


Vollrath de Mexico S. de R.L. de C.V.
Periferico Sur No. 7980 Edificio 4-E
Col. Santa Maria Tequepexpan
45600 Tlaquepaque, Jalisco | Mexico
Tel: (52) 333-133-6767
Tel: (52) 333-133-6769
Fax: (52) 333-133-6768

INTERNATIONAL CONVEYOR TOASTERS - 550-800 SLICES PER HOUR* (JT2, JT2H)

DIMENSIONS (Shown in inches (cm))

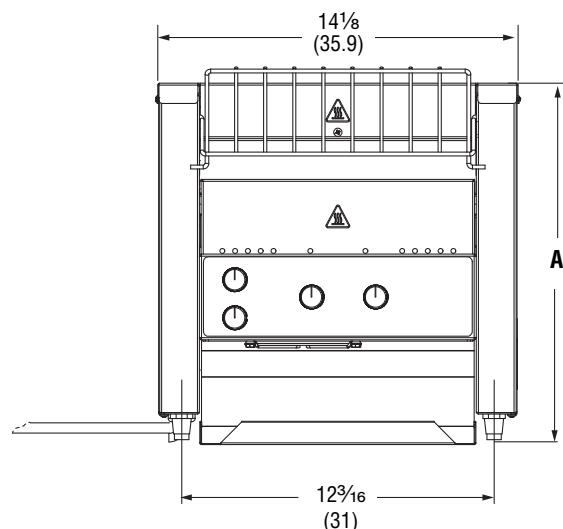

Front View

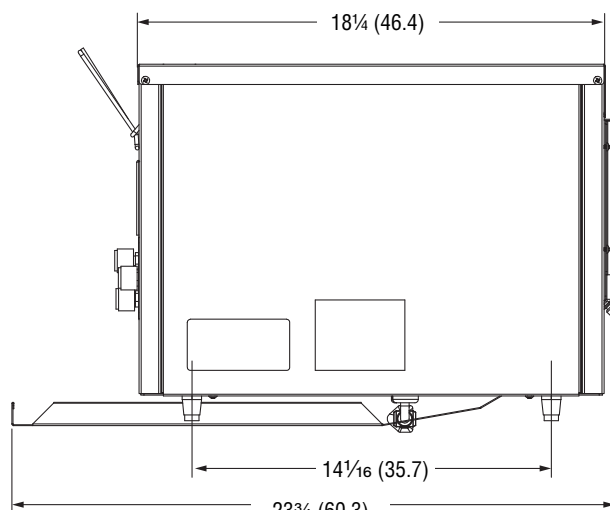

Side View

SPECIFICATIONS

| Item No. | Model | Slices or Bun Halves per Hour (Up to)* | Product Opening IN (CM) | Voltage | Maximum Watts | Amps | Hz | (A) Height IN (CM) | Weight LB (KG) | Plug | |
|---------------|-------|--|-------------------------|---------|---------------|------|-------|--------------------|----------------|--------|----|
| CT4-23080003 | JT2 | 800 | 1½ | 220-240 | 2800 | 11.2 | 50/60 | 14 | 45 (20.4) | UK | |
| CT4-23080002 | | | (3.8) | | | | | (35.6) | | Schuko | |
| CT4H-23055003 | JT2H | 550 | Adjustable | | | | | 15⅞ | | (38.4) | UK |
| CT4H-23055002 | | | 1½ - 3 (3.8 - 7.6) | | | | | | | | |

Receptacles



UK



Schuko

* Slices per hour is based on maximum conveyor speed. Conveyor speed determines toasting time and affects color and texture of the toast. Results may vary based upon type of bread, color and texture preference.

The Vollrath Company, L.L.C. Headquarters
1236 North 18th Street
Sheboygan, Wisconsin
53081-3201 USA
Main Tel: 800-624-2051 or 920-457-4851
Main Fax: 800-752-5620 or 920-459-6573
Canada Customer Service: 800-695-8560
Tech Services: techservicereps@vollrathco.com
www.vollrath.com

Pujadas
Ctra. de Castanyet,
132 P.O. Box 121
17430 Santa Coloma de Farners
(Girona) - Spain
Tel. +34-972-84-32-01
info@pujadas.es

Vollrath of China
Vollrath Shanghai Trading Limited
Room 201, Building A
Xin Yi Plaza
1618 Yi Shan Road
Shanghai, 201103
China, P.R.C.
Tel: +86-21-5058-9580

Vollrath de Mexico S. de R.L. de C.V.
Periferico Sur No. 7980 Edificio 4-E
Col. Santa Maria Tequepexpan
45600 Tlaquepaque, Jalisco | Mexico
Tel: (52) 333-133-6767
Tel: (52) 333-133-6769
Fax: (52) 333-133-6768