

Cook & Hold Oven

Model 1200-SK

Smoker Ovens effortlessly infuse bold flavors with real wood chips. No pressure-cooking or artificial smoke flavor required.

Gentle, low and slow Halo Heat® technology evenly surrounds food without the use of extremely hot elements, added humidity or fans. This controlled, uniform heat maintains precise temperatures throughout the hot smoking, cooking and holding process—improving food quality and extending hold times.

Cook by time or probe with simple or deluxe controls. Probes sense internal product temperature and automatically convert the oven from cook mode to hold mode once set parameters have been reached.

Labor-free, overnight smoking, cooking and holding paired with effortless operation reduces labor costs and increases productivity.

Advanced controls – designed intentionally simple – feature an intuitive, user-friendly interface and programmable recipes to ensure consistency with each cook.

ChefLinc™, cloud-based remote oven management software, streamlines processes and maximizes profits with data-driven insights [deluxe control only].

ISO 9001:2015-certified.

Standard Features

- Casters [two (2) rigid, two (2) swivel with brake]
- Two (2) single-point, straight removable probe
- Drip tray and drip pan with drain
- Programmable, touchscreen control on Deluxe model
- Programmable control on Simple model
- HACCP data collection on Deluxe model
- Easy recipe upload/download via USB port
- SureTemp™ heat recovery on Deluxe model
- Two (2) stainless steel side racks with fifteen (15) pan positions spaced 37mm on centers
- Removable exterior drip tray
- Woodchip tray and sample bag of woodchips



**CAPACITY
per Cavity**

7 GN 1/1 — 530mm x 325mm x 65mm

14 GN 1/2 — 265mm x 325mm x 65mm
Maximum weight per cavity: 54 kg
Volume maximum per cavity: 56.8 liters

Four (4) shelves and two (2) rib racks included.
Additional shelves required for maximum capacity.



IP X4



On all Cook & Hold heating elements [excludes labor]

ALTO-SHAAM



Shown with Deluxe control



Shown with Simple control

1200-SK

Configurations (select one each)

Models

- ☐ Simple
 - ☐ HACCP option
- ☐ Deluxe
 - ☐ Ethernet option (5032090)

Door Choice

- ☐ Right hinged, solid door, standard
- ☐ Right hinged, window door
- ☐ Left hinged, solid door
- ☐ Left hinged, window door

Electrical

- ☐ 230V, 1PH

Casters and Legs

- ☐ 89mm casters, two (2) rigid two (2) swivel with brake, option [5027133]
- ☐ 127mm casters, two (2) rigid two (2) swivel with brake, option, [5027112]
- ☐ 152mm legs, set of four (4) [5032092]
- ☐ 152mm seismic legs, set of four (4) [5032093]

Optional Accessories (select all that apply)

Bumper and Handles

- ☐ Full perimeter bumper
- ☐ Push/Pull handle kit

Additional Probes

- ☐ Sous vide probe [PR-36576]
- ☐ T-handle probe, up to six (6) with Deluxe per cavity [PR-46998]
- ☐ Straight probe, up to six (6) with Deluxe per cavity [qty two (2) included with oven] [PR-46999]

Drip Pans, Shelves, Holders

- ☐ Drip pan with drain [5025893]
- ☐ Drip pan, without drain [1034371]
- ☐ Increased capacity exterior drip pan [5030659]
- ☐ Shelf, stainless steel [SH-2325]
- ☐ Carving holder, prime rib [HL-2635]
- ☐ Carving holder, steamship [cafeteria round] [4459]

Cleaners

- ☐ Alto-Shaam, non-caustic cleaner one (1) 1-liter bottle [CE-46828]
- ☐ Alto-Shaam, non-caustic cleaner six (6) 1-liter bottles [CE-46829]

Accessories, misc.

- ☐ Door lock with key [5028755]


Woodchips, 0.9 kg bag

- ☐ Cherry [WC-22540]
- ☐ Apple [WC-22542]
- ☐ Maple [WC-22544]
- ☐ Hickory [WC-2828]

Cook & Hold Oven





Model 1200-SK

ALTO-SHAAM

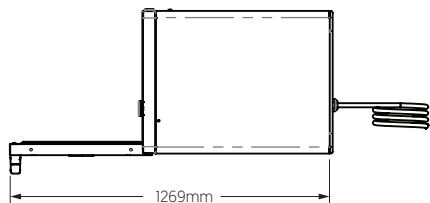

| OVERALL HEIGHT: 1200-SK | |
|-------------------------|------|
| Accessory | mm |
| 127mm caster | 1821 |
| 89mm caster | 1795 |
| 152mm leg (min) | 1767 |
| 152mm leg (max) | 1824 |
| 152mm seismic leg (min) | 1791 |
| 152mm seismic leg (max) | 1853 |

Shown with Simple control and 89mm casters

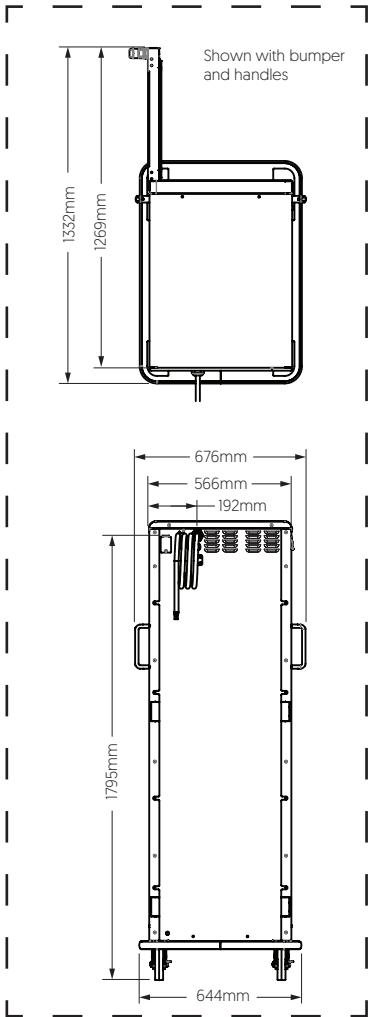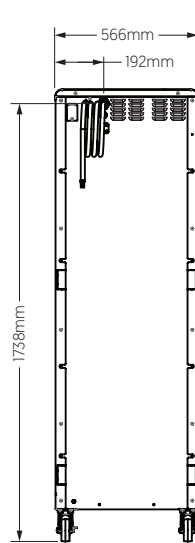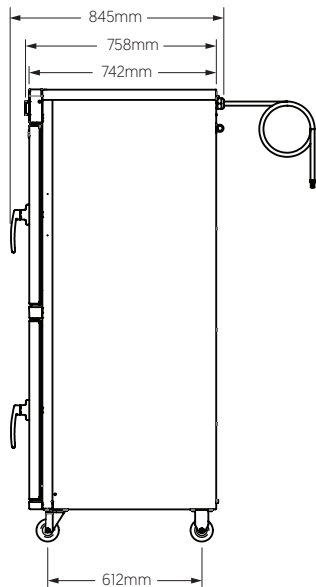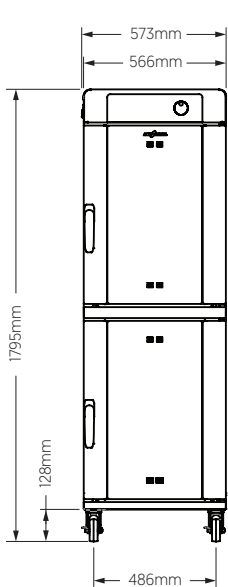

| Interior (H x W x D) Per Cavity | Net Weight | Ship Dimensions (L x W x H) | Ship Weight |
|------------------------------------|------------|-----------------------------|-------------|
| 683mm x 479mm x 673mm | 204 kg | 991mm x 991mm x 1372mm | 234 kg |



Top: 51mm
 Left: 51mm
 Right: 51mm
 Back: 76mm



The oven must be installed level.

The oven must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

See local installation codes for smoker ventilation requirements.

Cook & Hold Oven

Model 1200-SK



| Heat of rejection | | |
|-------------------|----------------------------|------------------------|
| 1200-SK | Heat Gain qs, BTU/hr | Heat Gain qs, kW |
| | 1,662 | 0.49 |



Cooking temperature range:
94°C–163°C

Holding temperature range:
29°C–96°C



1200-SK Smoker

| 1200-SK | V | Ph | Hz | Awg | IEC | A | Breaker (A) | kW | Plug Configuration | Certification |
|------------|-----|----|-------|-----|-----|----|-------------|------|--|---------------|
| 208–240V** | 208 | 1 | 60 | 8 | — | 33 | 50 | 6.9 | Alto-Shaam offers a number of readily available cord and plug configurations. Contact factory for options. | |
| | 240 | 1 | 60 | 8 | — | 37 | 50 | 8.9 | | |
| 230V | 230 | 1 | 50/60 | 8 | — | 36 | 50 | 8.3 | | |
| | 230 | 1 | 50/60 | 8 | — | 25 | 32 | 5.7* | | |
| 380-415V | 380 | 3 | 50/60 | 10 | 2.5 | 20 | 25 | 7.7 | | |
| | 415 | 3 | 50/60 | 10 | 2.5 | 22 | 32 | 8.9 | | |

Electrical connections must meet all applicable federal, state, and local codes.

*Reduced wattage configuration.

** Dedicated circuit required.

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com