GLASSWASHER GP-35

Rack size 350 mm x 350 mm and door clearance 240 mm.



SALES DESCRIPTION

Sani-Control guarantee

- GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- √ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- √ Upper and lower washing.
- ✓ Construction in stainless steel AISI 304 2B.
- ✓ Interior with rounded finishes to prevent the accumulation of dirt.

Double filter system

Maximum protection of the washing pump.

Double-walled door

✓ Double-walled door, safety microswitch and high quality seal: perfectly soundproof and watertight.

Warewashing, made simple

- √ GP Xperience: simple and intuitive use.
- ✓ Dedicated cycles: selection of the ideal washing programme using
- ✓ Electronic control panel with IP65 humidity protection.
- √ 100% Tested.

Tech-friendly

- √ Tool-free extraction of diffusers and filters for maintenance and
- √ Easy access to components for repair.

INCLUDES

- √ Rinse aid pump.
- √ 1 mixed basket (plates).
- √ 1 glasses basket.
- √ 1 small basket for cutlery.

OPTIONAL

- Detergent dosing kit.
- Overflow drainage pump. Tank

water renewal by the principle of density.

Accessories

- Manual water softeners
- Automatic water softeners
- □ 350X350 mm. baskets
- ☐ Inserts & supplements
- High feet kit
- ☐ Reverse osmosis devices OS-140
- Detergent dosing equipment for GP glasswashers

SPECIFICATIONS

Basket dimensions: 350 mm x 350 mm

Useful height: 240 mm

Cycle duration: 120 / 150 " Production baskets/hour: 30 / 24

Boiler capacity: 3.2 I Wash tank capacity: 12.7 I Water consumption/cycle: 2.2 I

Loading

- √ Pump: 75 W / 0.1 Hp
- √ Tank: 1200 W
- ✓ Boiler: 2500 W
- √ Total loading: 2575 W

Electrical connection: --

External dimensions (WxDxH)

- √ Width:420 mm
- ✓ Depth: 495 mm
- √ Height: 645 mm

Net weight: 31 kg

Noise level (1m.): <70 dB(A)

Crated dimensions

485 x 590 x 690 mm

AVAILABLE MODELS

1303030 GP-35 230/50/1

1303031 GP-35 220/60/1


1303035 GP-35B 230/50/1

* Ask for special versions availability







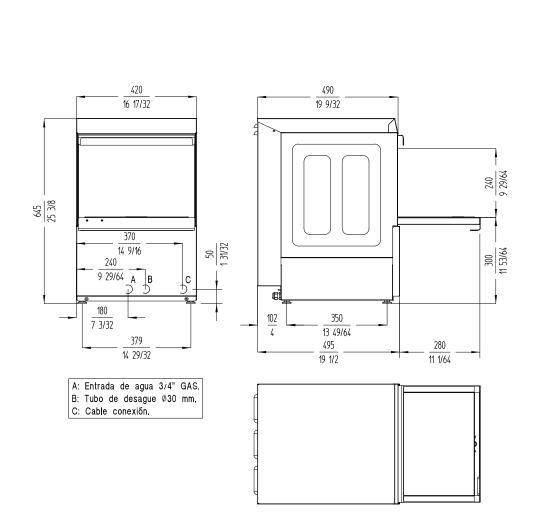



Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



	Project	Date
	Item	Qty