

UNDERCOUNTER GLASSWASHERS
GC SERIES






HOBART UK,
SOUTHGATE WAY,
ORTON SOUTHGATE,
PETERBOROUGH.
PE2 6GN
0844 888 7777

www.hobartuk.com

Undercounter Glasswasher with Reverse Osmosis Unit

GCROIW-10B

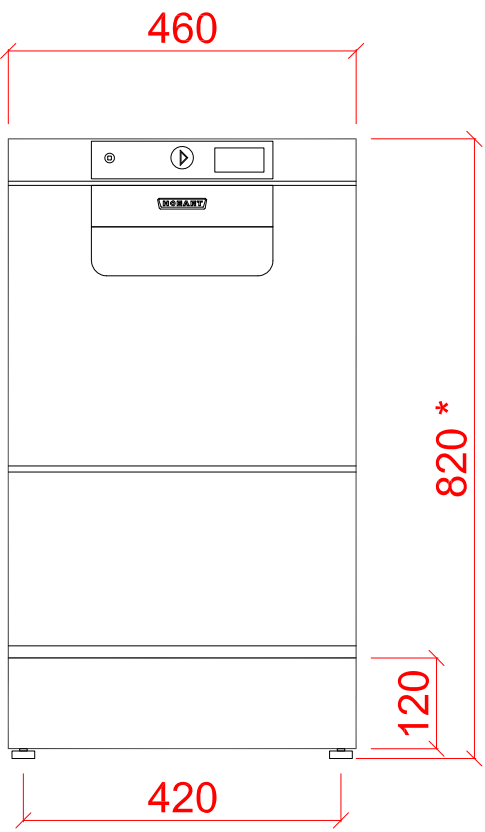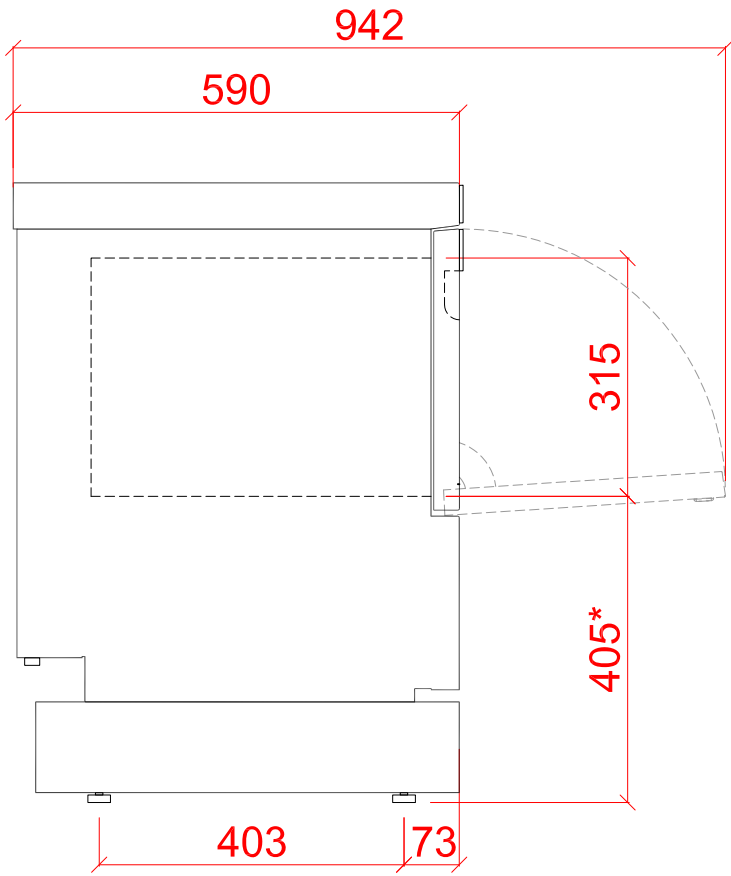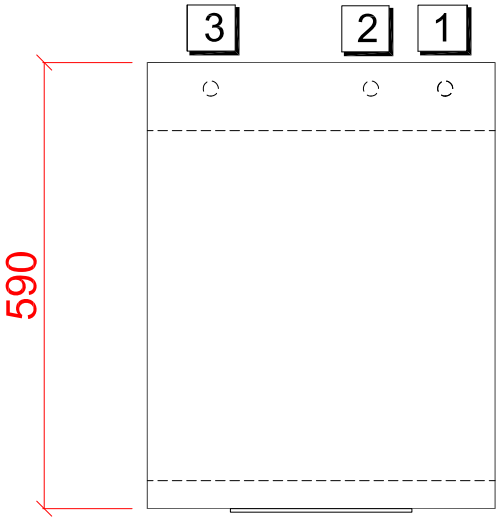

1 Water	2 Drain	3 Electric
22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE, FEMALE TERMINATION. WATER SUPPLY 10C TO 60°C (0°-12° CLARK MAX) @ 1.0 TO 10.0 BAR MAX. INITIAL TANK FILL 8 LITRES. RINSE WATER USAGE 1.9 LITRES PER CYCLE. MAX USAGE 110 LITRES PER HOUR. OUR MACHINES ARE SUPPLIED WITH CLASS 'AB' AIR GAP AS STANDARD.	DRAIN - 1.75 METRE FLEXIBLE HOSE TO A 40mm TRAPPED STANDPIPE 600mm MAX A.F.F.L. FLOW RATE 30 LITRES PER MINUTE. Other Services RINSE AGENT HOSE - 2.5 METRE FLEXIBLE. DETERGENT HOSE - 2.5 METRE FLEXIBLE.	4.8kW 400/50/3 FUSED AT 3 x 16amps MACHINE SUPPLIED WITH 2.0 METRES OF CABLE CONFIGURABLE TO: 5.6kW 230/50/1 FUSED AT 25amps ELECTRICS FOR ROI ARE THROUGH DISHWASHER. Notes APPROX WEIGHTS: EMPTY: 50kg's WITH WATER: 64kg's Height * +40mm -0mm

PLOT SCALE: 1:10

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED