

UNDERCOUNTER GLASSWASHERS  
GC SERIES






HOBART UK,  
SOUTHGATE WAY,  
ORTON SOUTHGATE,  
PETERBOROUGH.  
PE2 6GN  
0844 888 7777

www.hobartuk.com

Undercounter Glasswasher

GCPW-10B

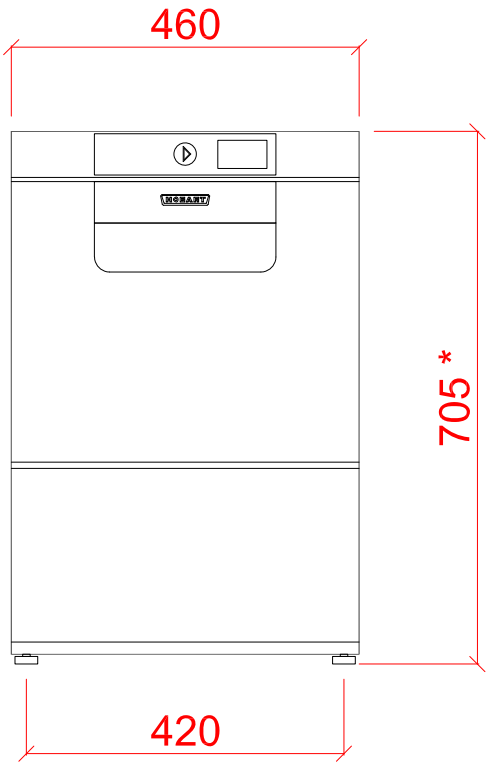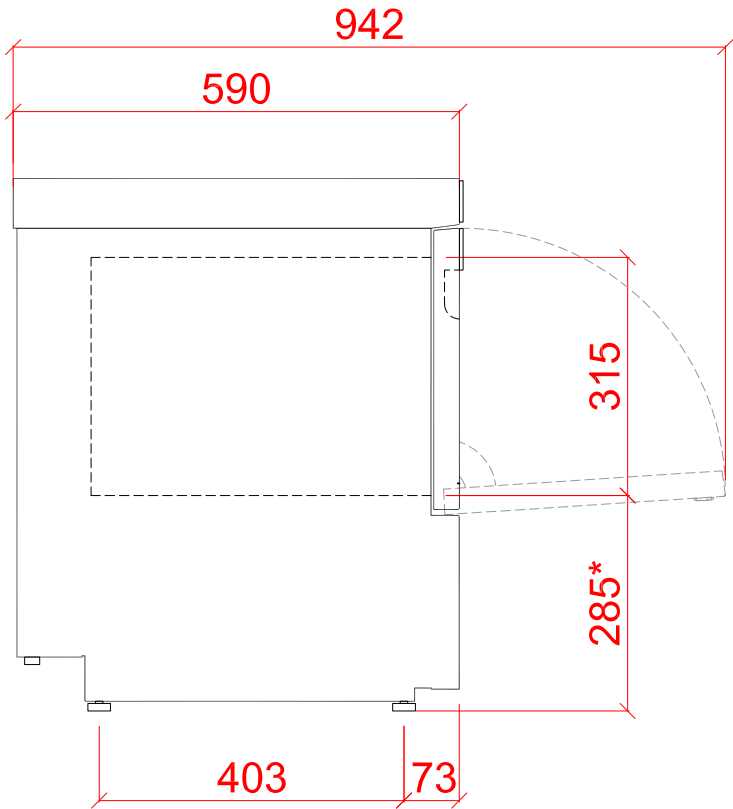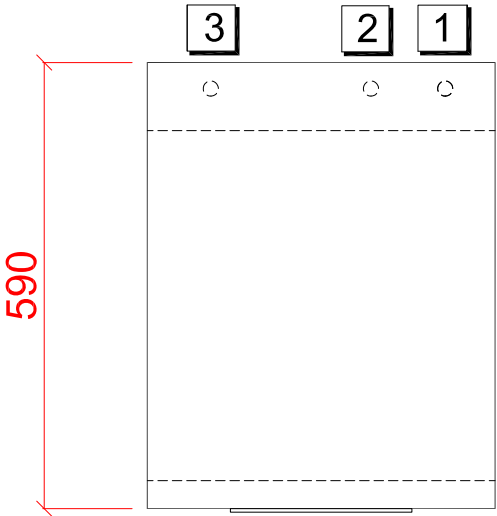

1 Water

22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE, FEMALE TERMINATION.

WATER SUPPLY 55°C TO 60°C (0°- 3°CLARK MAX) @ 0.5 TO 10.0 BAR MAX. INITIAL TANK FILL 8 LITRES.

RINSE WATER USAGE 1.9 LITRES PER CYCLE. MAX USAGE 110 LITRES PER HOUR.

OUR MACHINES ARE SUPPLIED WITH CLASS 'AB' AIR GAP AS STANDARD

2 Drain

DRAIN - 1.75 METRE FLEXIBLE HOSE TO A 40mm TRAPPED STANDPIPE 600mm MAX A.F.F.L.

FLOW RATE 30 LITRES PER MINUTE.

**Other Services**

RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.  
DETERGENT HOSE - 2.5 METRE FLEXIBLE.

3 Electric

4.6kW 400/50/3 FUSED AT 3 x 16amps.  
MACHINE SUPPLIED WITH 2.0 METRES OF CABLE  
**CONFIGURABLE TO:**  
5.6kW 230/50/1 FUSED AT 25amps or

**Notes**

APPROX WEIGHTS:  
EMPTY: 50kg's WITH WATER: 64kg's  
**Height \* +40mm -0mm**

PLOT SCALE: 1:10

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED