



DISHWASHER AX-100BC 230/50/1

Pass-through glass- and dishwasher. Rack size 500 x 500 mm and door clearance 430 mm.

1303313



WARE WASHING
PASS-THROUGH WAREWASHERS

product sheet
updated 16/04/2024

- ✓ High load capacity 43 cm: suitable for GN 1/1 and Euronorm
- ✓ Stainless steel surface filters for greater stability and resistance during intensive use

Warewashing, made simple

- ✓ TEMPERATURE DISPLAY
- ✓ Control panel with IP65 humidity protection.

You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

INCLUDES

✓ Detergent Dispenser.	ved break tank.
✓ Drainage pump with level sensor. Proactive tank water renewal.	✓ Rinse aid pump.
✓ Type-A air break.WRAS appro-	✓ 1 glasses basket.
	✓ 1 mixed basket (plates).
	✓ 1 cutlery basket.

OPTIONAL

- Automatic resin regeneration water softener with salt detector.

ACCESSORIES

<input type="checkbox"/> Tables for pass-through dishwashers	sorting table
<input type="checkbox"/> Manual water softeners	<input type="checkbox"/> Prewashing tables for pass-through and rack conveyor dishwashers
<input type="checkbox"/> Automatic water softeners	<input type="checkbox"/> Connecting tables for pass-through dishwashers and rack conveyors
<input type="checkbox"/> 500 x 500 mm baskets	<input type="checkbox"/> Reverse osmosis devices OS-140
<input type="checkbox"/> Inserts & supplements	
<input type="checkbox"/> Central sorting tables	
<input type="checkbox"/> Double connection central	

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm
Useful height: 430 mm

Cycles: 3
Cycle duration: 120 / 180 / 210"
Production baskets / hour: 30 / 24 / 17

- ✓ Boiler capacity: 12 l
- ✓ Wash tank capacity: 25 l
- ✓ Water consumption / cycle: 2.8 l

Energi consumption

Loading

- ✓ Pump: 750 W / 1.0 Hp
- ✓ Tank: 2500 W
- ✓ Boiler: 6000 W
- ✓ Total loading: 6700 W

Electrical supply: 230 V / 50 Hz / 1~ (30 A)

External dimensions (W x D x H)

- ✓ Width: 648 mm (Wide with handle: 725 mm)
- ✓ Depth: 756 mm (Bottom with handle: 835 mm)
- ✓ Height: 2000 mm / 1508 mm

Rinse temperature: 87°C

SALES DESCRIPTION

Sani-Control: guaranteed disinfection. Constant high temperature rinse system for optimal disinfection. Exclusive Hydroblade™ washing arms: maximum effectiveness. 3-stage filtering system.

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing
- ✓ WRAS certified.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).

Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The "monoblock" design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.

Designed to last

- ✓ "Flow" opening mechanism: allows the hood to be raised with less effort



Basalt, 1-20720 AZKUTIA
www.sammic.com



DISHWASHER AX-100BC 230/50/1

Pass-through glass- and dishwasher. Rack size 500 x 500 mm and door clearance 430 mm.

1303313

Net weight: 112 kg


Gross weight: 123 kg

Crated dimensions

760 x 860 x 1530 mm



WARE WASHING
PASS-THROUGH WAREWASHERS

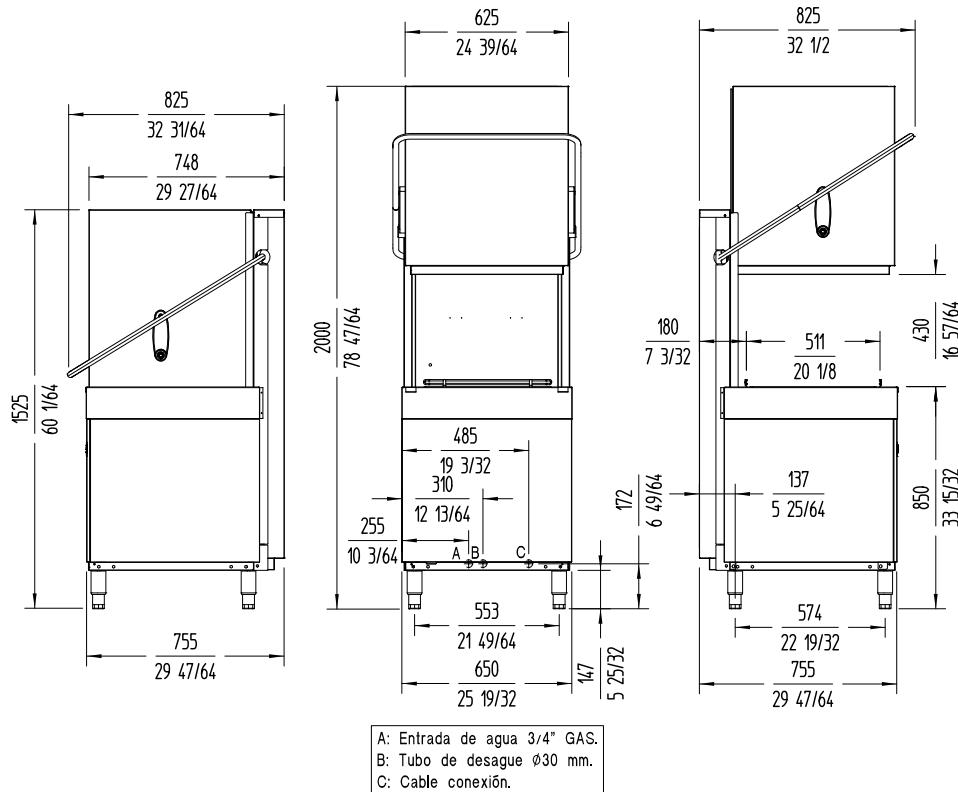

www.sammic.co.uk

Food Service Equipment Manufacturer
Unit 2, Trevanth Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 16/04/2024